


Characteristics

Rated switching distance 1 mm with module 1
Static version, 0 ... 12 kHz
DC-three-pole, push-pull output (plus- and minus-switching)
High geometrical resolution power (module ≥ 1)
Hall element switches are unsuitable for detecting slots, for axial approach, and for non-magnetic materials

Dimensions

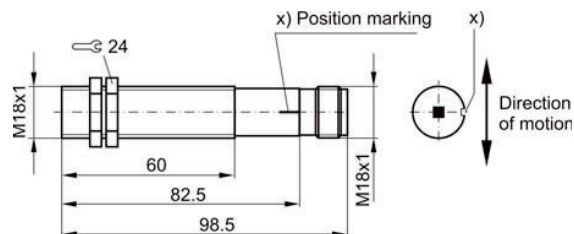

Technical Data

(Unless otherwise specified $U_B = 24$ V, $T_U \approx 23$ °C, $I_L = 0$)


Rated switching distance s_n (10 kHz)	1 mm with module 1
Effective operating distance s_r	$s_n (1 \pm 10\%)$
Operating voltage U_B	10 ... <u>24</u> ... 30 VDC
Permissible ripple voltage	10 %
Current consumption without load	≤ 25 mA
Maximum current load capacity of the output	≤ 25 mA
Residual current (locked output)	plus-switching ≤ 0.3 mA minus-switching ≤ 0.3 mA
Voltage drop (conductive output; $I_L = 25$ mA)	plus-switching ≤ 12 V minus-switching ≤ 10 V
Output	push-pull, temporary short-circuit protection ≤ 20 s
Operating frequency f	0 Hz ... 12 kHz
Ambient temperature range T_U	- 25 ... + 100 °C
Reverse polarity protection	yes
Connection	plug connection M18, 4-pole
Maximum lead length	≤ 150 m
Weight	150 g
Design	M18
Housing material / sensing face	steel, nickel-plated / plastic (Crastin)
Maximum tightening torque	40 Nm
Protection rating according to EN 60529	IP 65

Notes


For mounting, a precise vertical alignment of the housing to the tooth flanks is necessary. The switching point is not in the geometric axis of the hall element switch. Keep away metal cuttings from the sensing face. Avoid operation near strong magnetic fields. The distance between the connecting lead and the control leads of the inductive loads should be ≥ 30 cm. Use a shielded lead for lead length > 10 m. When the sensor is switched on but not activated, the output signal may either show a low or high state. The hall element is self-calibrating and needs therefore several operating cycles in order to adjust itself to the geometry of the application, after the supply voltage has been switched on. After this phase the distance between sensor and actuator may principally not be changed again. The periodic changes of the operating distance (e.g. by the vibrations of the plant), however, are compensated by the evaluation electronics.

Mounting Instructions

Gear wheel St37 / C45

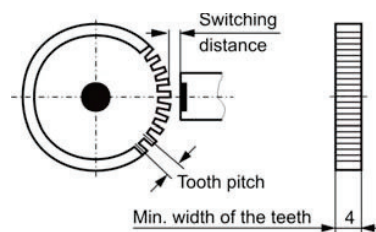

Operating distance as a function of module and operating frequency

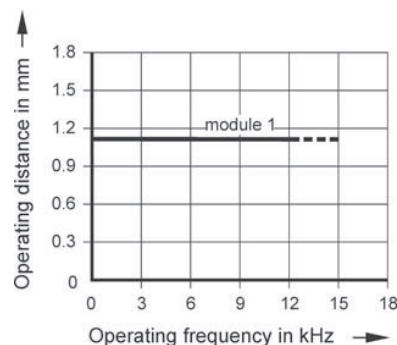

Certification

Complies with standard EN 60947-5-2



Safety regulations


Connection, commissioning and maintenance may only be accomplished by qualified or instructed staff.

We are certified according to DIN EN ISO 9001

Subject to technical changes!

Connection

DC voltage, three-pole,
push-pull output, plug connection

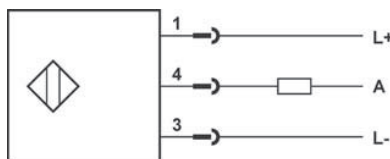

Plug

