

Light barrier amplifier

ISM-8800

pantron
sensor technology

Features

- 8-channel multiplex light barrier with modulated infrared light
- Range up to 60 m
- Menu-driven operation via display
- Manual / automatic operation selectable
- Permanent sensor monitoring
- Test function
- Switching ON and OFF delay adjustable
- Switching output 60 V / 100 mA, floating distance
- Alarm output for power limit
- Test input for external test equipment
- Sensor connections are short circuit proof
- Master-Slave mode
- Mounting for DIN rail EN 60 715

Short Description

Light barrier amplifiers are used for the detection of objects in machines or production systems. They form, in conjunction with one infrared transmitter and receiver a powerful light barrier and they are useable in areas with a long range or an extreme degree of pollution in which traditional light barriers reach their limits.

The modulation of the infrared light will additionally give the system a high degree of immunity to ambient light, disturbing impulse and influence from other light barriers.

The amplifier is equipped with an automatic power adjustment, with which the transmit power adjusts to the special environments of the application.

To increase the overall accuracy of the device, permanent sensor monitoring was included, which detects errors at the sensor heads and signals this to the user by the alarm output. The exact error cause, short circuit or broken wire at the transmitter or receiver, may also be read on the display.

A floating distance switching output reports the light beam status to an evaluation unit, (e.g. a PLC). Included as extra equipment is the integrated test input with which it is possible to make an examination of the light barrier system's functionality.

If more than 8 channels are necessary a synchronized operation, to prevent influences between the channels form additional devices, is possible by connecting the master-slave connection.

As a special feature, the device includes a serial interface for easy operation with a PC (Software is optional available).



Safety Instructions




Warning!

The infrared light barriers ISM-... are not safety systems and should not be used as such systems.

The devices are not to be used for applications, where personal safety is dependent on their function.

Device Overview

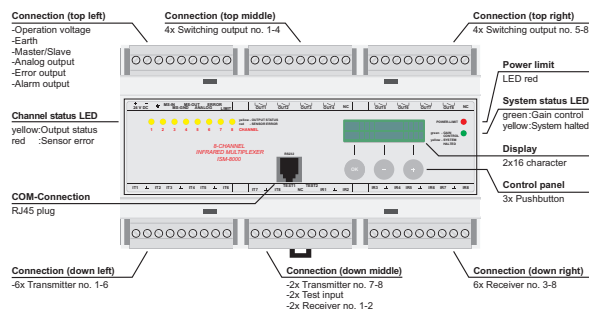

Ordering Table

Type	Order code
ISM-8800 pluggable	ISM-8800/24VDC
Accessories	
Communication cable	CAB-COM-2m
Power supply unit 95...265 V AC	PSU-1000S/95-265VAC
Protective enclosure	PanBox 1x8

DS140912EN - 05/2015

Light barrier amplifier


ISM-8800

Technical Data (at 20 °C / 68 °F, 24 V DC)

Operating voltage	24 V DC / ±20%	Switching output	NO (semiconductor relay) floating distance, short circuit proof	
Power consumption (max.) ¹	4,6 W			
Power loss (max.) ¹ (EN 61439)	4,6 W		Switching data (max.)	100 mA / 60 V AC (DC)
			Reaction time	36 ms
Operating basis	modulated infrared light		Alarm output	pnp, 24 V DC
Transmit frequency	4,0 kHz		current carrying capacity	100 mA
Transmit power	manual / automatic		Error output	pnp, 24 V DC
Basic transmit level	low / high		current carrying capacity	100 mA
Switching behavior	light / dark		Test input	max. 30 V DC / 2 mA
Multiplex speed	34 ms		response voltage	Low < 5 V DC; High > 15 V DC
Switching delay	0...60 s	Analog output	0...10 V DC or 10...0 V DC	
MTBF (IEC 61709)	5,0 · 10 ⁵ h (T _a = 40 °C / 104 °F)	COM interface	RS232	
Operation temperature	0 °C ... 50 °C (32 °F ... 122 °F)			
Storage temperature	-10 °C ... 60 °C (14 °F ... 140 °F)	max. Range (through beam)	Receiver IRL-...	Receiver IR-..., IRH-...
Housing material	NORYL (self-extinguishing)	Transmitter IT-..., ITL-...	10 m (33 ft)	15 m (49 ft)
Protection class (EN 60529)	IP20	Transmitter IT-...HP, ITH-...	12 m (39 ft)	25 m (82 ft)
Mounting	top hat rail EN 60715	Transmitter ITA-...	25 m (82 ft)	60 m (197 ft)
Electrical connection	screw terminal, pluggable 0,14 - 2,5 mm²	¹ Without loads at the outputs²		

¹ Without loads at the outputs

Connection Diagram

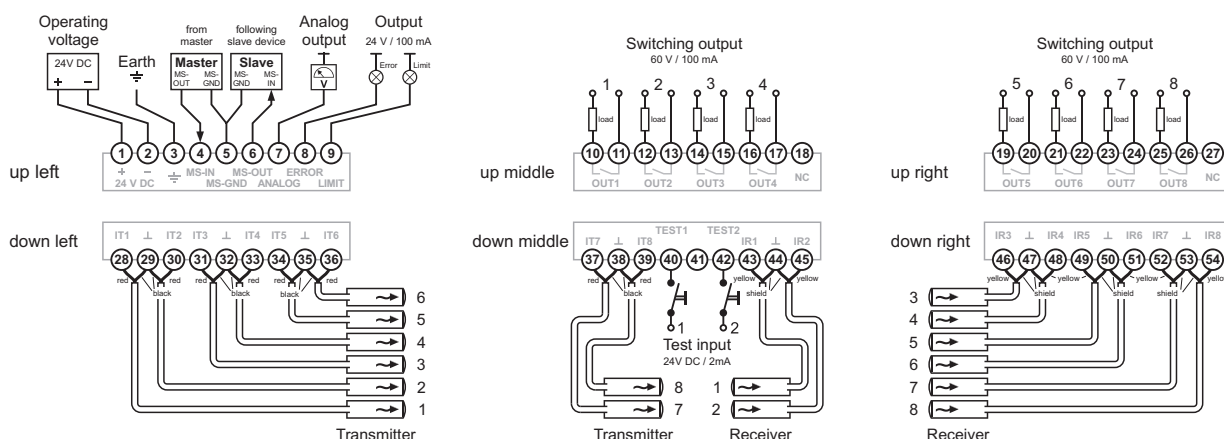

Dimensions (in mm)

